
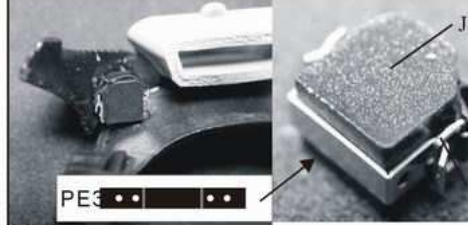
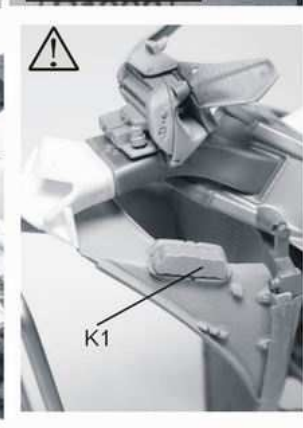











Top Studio YZR-M1 2005

Detail Master 1/12 Super Detail-Up Set











www.topstudiohobby.com

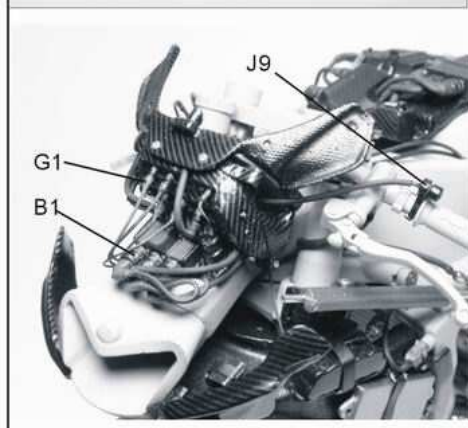

! 注意这些零件与车壳的配合! Pay attention to the fitting of small parts and cowling

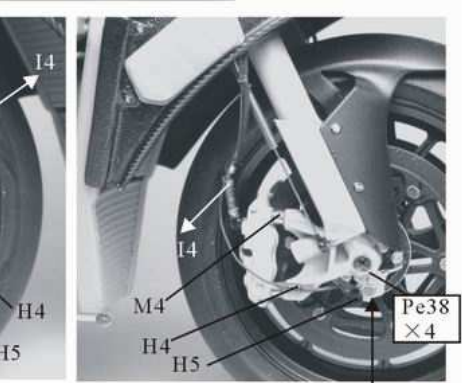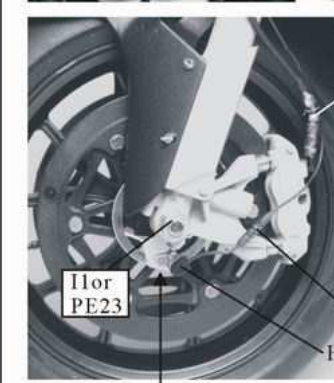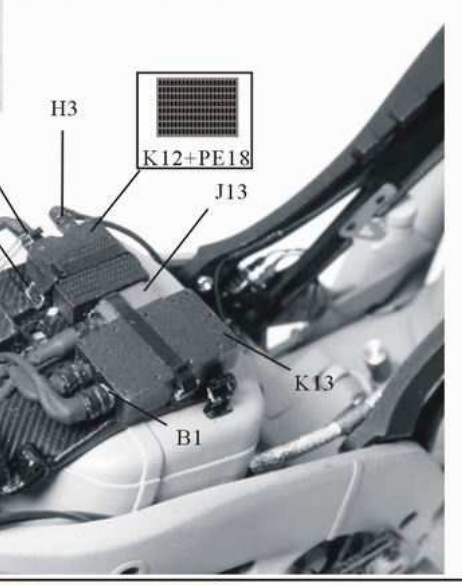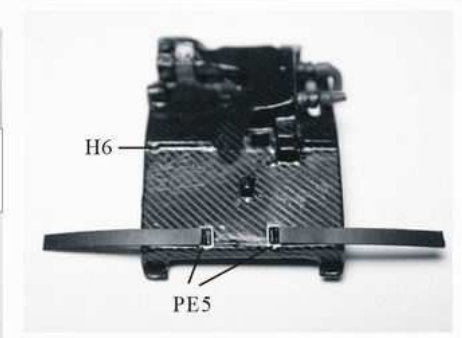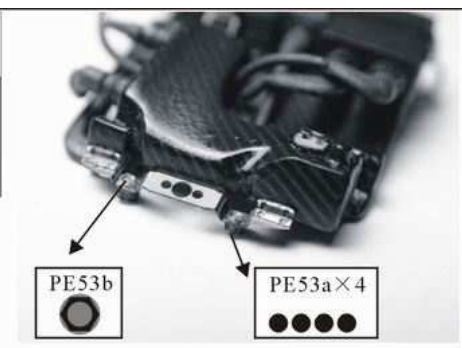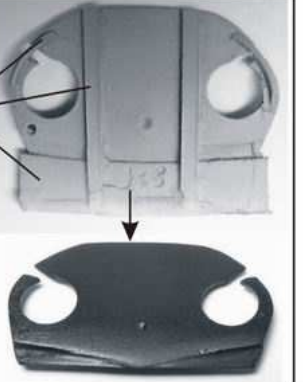


J5, M5选择替换
Use either J5 or M5

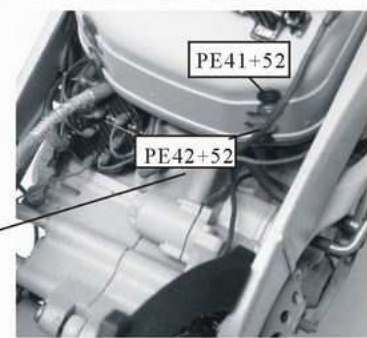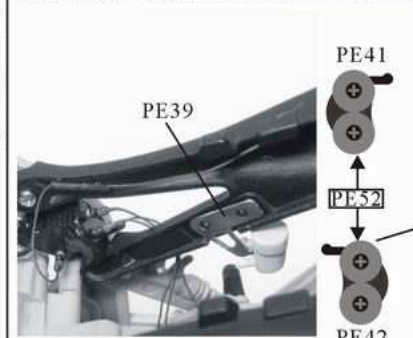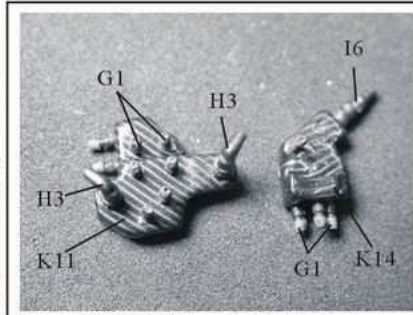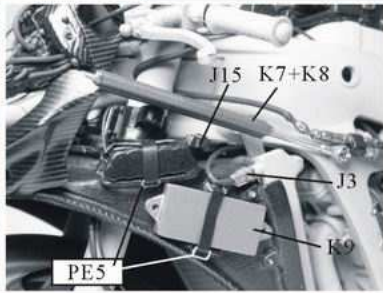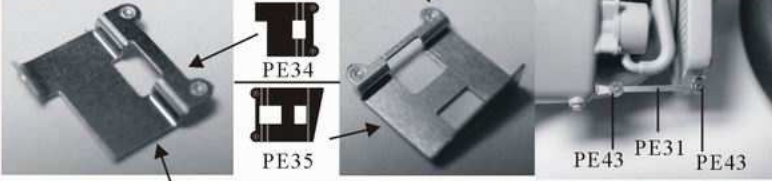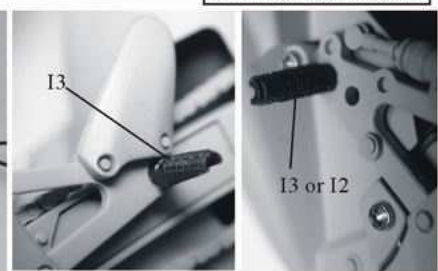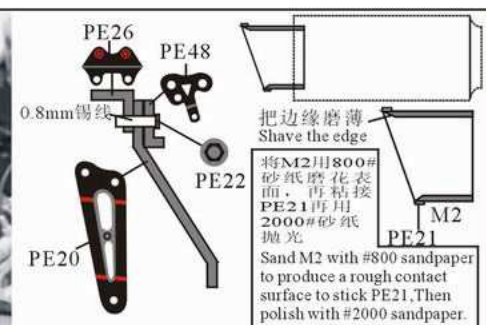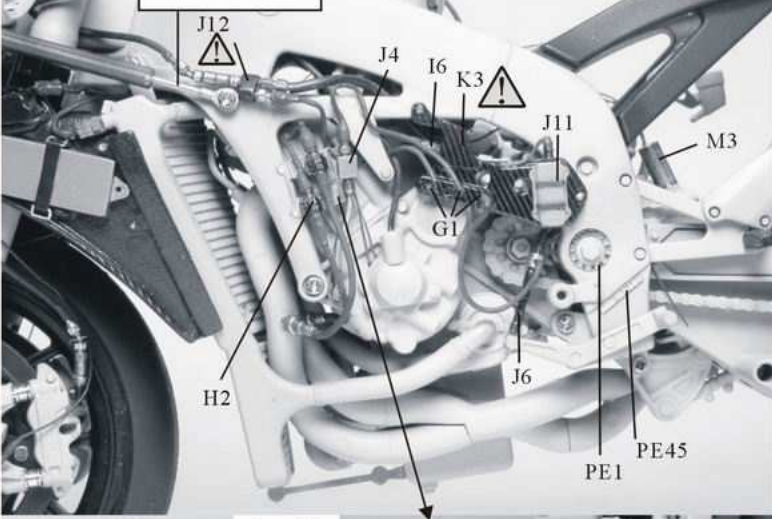

配线使用:
1、0.5mm-0.6mm电线将树脂接头钻孔后直接使用
2、银色油管, 将管线贴上铝箔再用平锉压出纹路
3、热缩管的使用: 将热缩管加热并加长, 可得到不同线径的线段

Wiring usage:
1. Inserting 0.5mm 0.6mm wire into a hole drilled electronic plug
2. For the silver cord, wrap the wire with silver metal foil. Use a flat file and press the foil surface to get the effect.
3. shrink tube usage: heat and stretch the shrink tube to get different thickness.

热缩管 Shrink tube	加工范围 Size
黑色管(细) Black (thin)	1.0mm~0.4mm
黑色管(粗) Black (thick)	1.3mm~0.5mm
透明管 Clear	1.5mm~1.0mm




小接头G1的配线选择:
1、0.2mm金属线
2、黑色流道加热拉长(需自己制作)
3、0.2mm金属线+热缩管
4、0.4mm热缩管

Small connectors G1 wiring options:
1. 0.2mm metal wire
2. black wire (use shrink tube to make)
3. 0.2mm metal wire + shrink tube
4. 0.4mm shrink tube

树脂部件
Resin Parts



金属部件
Metal Parts

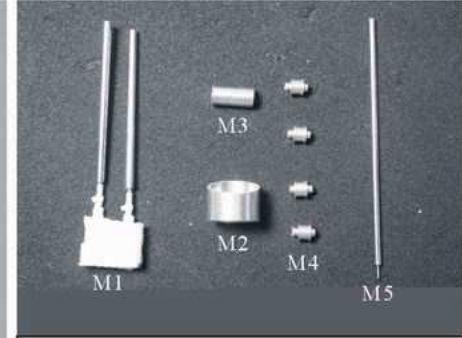

其它部件:
蚀刻片A×1, B×1
热缩管×4
0.2mm金属线×1
细金属线×1
0.8mm锡线×1
0.5mm, 0.6mm电线×2
铝箔贴纸×1
黑色胶贴×1

Other parts:
Photo-etched plate A × 1, B × 1
Shrink tube × 4
0.2mm metal wire × 1
thin metal wire × 1
0.8mm solder line × 1
0.5mm, 0.6mm wire × 2
silver metal foil sticker × 1
black band × 1